


Bande Low-Voltage Track




- White
● Black

Features



Dimensions

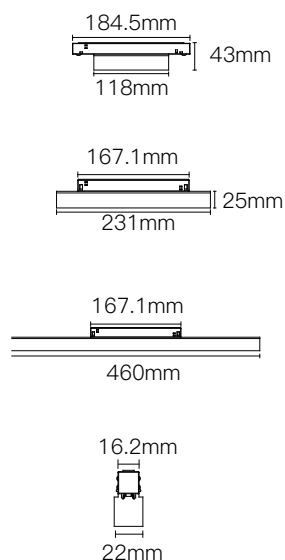

Electrical system

Total power consumption:	6W / 10W / 20W
Power input:	48V
Operating temperature:	-10°C ~ 35°C
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class III

Light source

LED type:	SMD
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	38°
UGR:	<16

Housing

Lamp body diameter:	118mm x 22mm / 231mm x 22mm / 460mm x 22mm
Material:	Aluminum
Weight:	110.3g / 178.2g / 316.5g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
38° (6W)	315lm	350lm	385lm
38° (11W)	450lm	500lm	550lm
38° (20W)	990lm	1100lm	1210lm

Nomenclature

*Applicable model: M410xxx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M410	06(6W)	27(2700K)	90(90)	38(38°)	N(Non-Dim)	01(Black)
	11(11W)	30(3000K)			A(0-10V dim)	02(White)
	20(20W)	40(4000K)			D(Dali dim)	

Illuminance distance data

Bande

6W



38°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	707.40	0.71x0.66	0.4
2	176.85	1.43x1.32	1.5
3	78.60	2.14x1.99	3.4
4	44.21	2.86x2.65	6.1
5	28.30	3.57x3.31	9.5

Bande

11W



38°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	1285.18	0.53x0.53	0.2
2	321.30	1.07x1.06	0.9
3	142.80	1.60x1.59	2.0
4	80.32	2.13x2.12	3.6
5	51.41	2.67x2.65	5.6

Bande

20W



38°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	2744.10	0.50x0.51	0.2
2	686.03	1.01x1.03	0.8
3	304.90	1.51x1.54	1.8
4	171.51	2.01x2.06	3.3
5	109.76	2.52x2.57	5.1