

Ami-Round

Mains Voltage Recessed


Zoom




Motorised Downlight.
Integrated power supply.

- White
 Black

Features



Dimensions

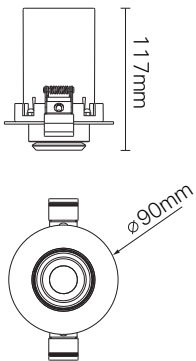

Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class II

Light source

LED type:	COB
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Dimension:	90mm X 117mm
Material:	Aluminum
Weight:	445g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
18°-45°	290lm	320lm	350lm

Nomenclature

*Applicable model: M20110xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.	
M201	10(10W)	27(2700K)	90(90)	Z2(18°-45°)	N(Non-Dim)	01(Black)	
		30(3000K)				A(0-10V dim)	02(White)
		40(4000K)				D(Dali dim)	
		TW(Tunable)					

Ami-Square Mains Voltage Recessed

Zoom




Motorised Downlight.
Integrated power supply.

- White
 Black

Features



Dimensions

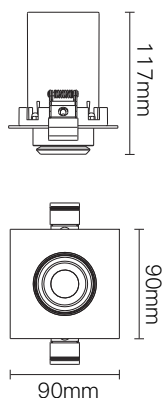

ø82mm

Electrical system

Total power consumption:	10W
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali / Casambi
Insulation class:	Class II

Light source

LED type:	COB
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Dimension:	90mm X 90mm X 117mm
Material:	Aluminum
Weight:	420g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
18°-45°	290lm	320lm	350lm

Nomenclature

*Applicable model: M20310xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M202	10(10W)	27(2700K) 30(3000K) 40(4000K)	90(90)	Z2(18°-45°)	N(Non-Dim) A(0-10V dim) D(Dali dim)	01(Black) 02(White)
		TW(Tunable)				

Ami-Rectangle Mains Voltage Recessed


Zoom




Motorised Downlight.
Integrated power supply.

- White
 Black

Features



Dimensions

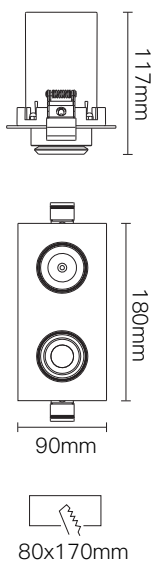

Electrical system

Total power consumption:	10W*2
Power input:	220Vac
Operating temperature:	-10°C ~ 35°C
Power factor:	>0.95
Dimming option:	0-10V / Dali /Casambi
Insulation class:	Class II

Light source

LED type:	COB
CCT:	2700K/3000K/4000K
CRI:	Ra>90
Beam angle:	18°-45°
UGR:	<16

Housing

Dimension:	180mm X 90mm X 117mm
Material:	Aluminum
Weight:	885g

Warranty

Period:	5-year warranty
----------------	-----------------

Lumen output

BA. \ CCT	2700K	3000K	4000K
18°-45°	290lm*2	320lm*2	350lm*2

Nomenclature

*Applicable model: M20320xx90xxxx (xx: dynamic codes)

Product Code	System Power	CCT	CRI	Beam Angle	Driver/Control	Serial No.
M203	20(20W)	27(2700K) 30(3000K) 40(4000K)	90(90)	Z2(18°-45°)	N(Non-Dim) A(0-10V dim) D(Dali dim)	01(Black) 02(White)
		TW(Tunable)				

Illuminance distance data

Ami Downlight

Zoomable 10W



18°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	2212.77	0.85	0.6
2	553.19	1.69	2.3
3	245.86	2.54	5.1
4	138.30	3.39	9.0
5	88.51	4.24	14.1

45°

h(m)	E(lx)	Ø (m)	S_B(sq.m)
1	630.69	0.26	0.1
2	157.67	0.52	0.2
3	70.08	0.78	0.5
4	39.42	1.04	0.9
5	25.23	1.30	1.3